


Tek-Co Tool Electronics Ltd.



1 3/8" Logging CCL

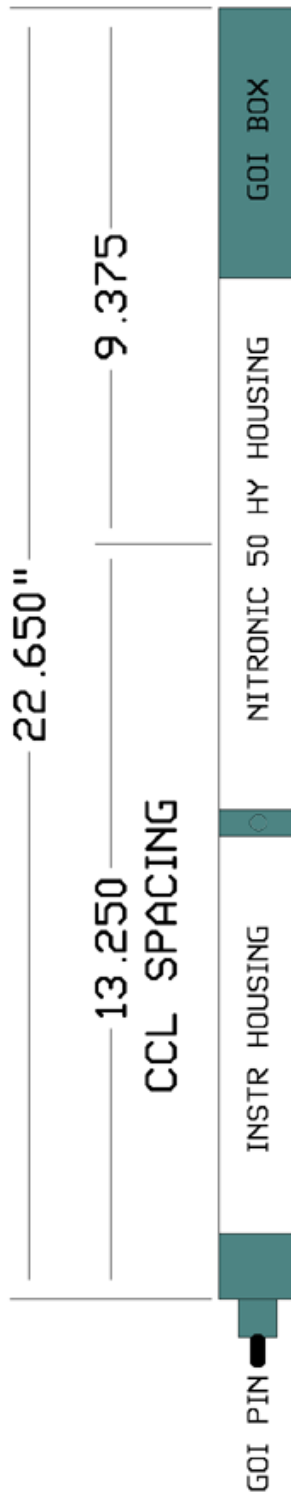

Specifications

120VDC @ 3mA
400° F @ 20,000 PSI

This is one rugged CCL

Special Notes

CCL can be configured to run
Positive DC
Negative DC
Positive and Negative DC

The CCL coil and magnets are isolated mechanically, taking all stress off the CKT BD. the CKT BD. assembly is mounted on milled out half round 7075 T-651 Aluminum bar. This gives it Exceptional Strenght

Tek-Co Tool Electronics
P.O. Box 9880
Tyler, TX 75711
903-581-5675
www.tekcotools.com